


APPLICATION NOTES

VAC ALLOYS

FOR MOTOR AND GENERATOR APPLICATIONS

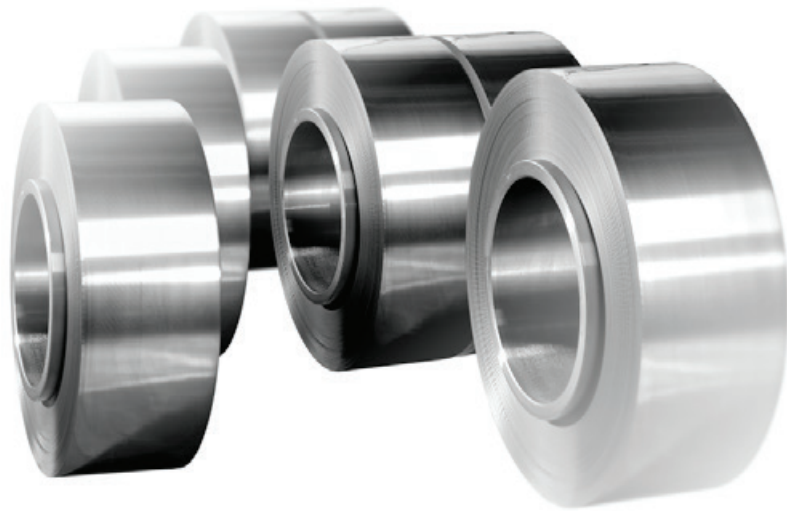

COBALT-IRON ALLOYS (VACOFLEX®, VACODUR®)


- Maximum Forces and Power Densities
- Low Losses
- High Strength

NICKEL-IRON ALLOYS (PERMENORM®, MEGAPERM®, ULTRAVAC®)

- Lowest Losses
- Highest Permeabilities

ADVANCED MATERIALS – THE KEY TO PROGRESS

VAC[®]
VACUUMSCHMELZE

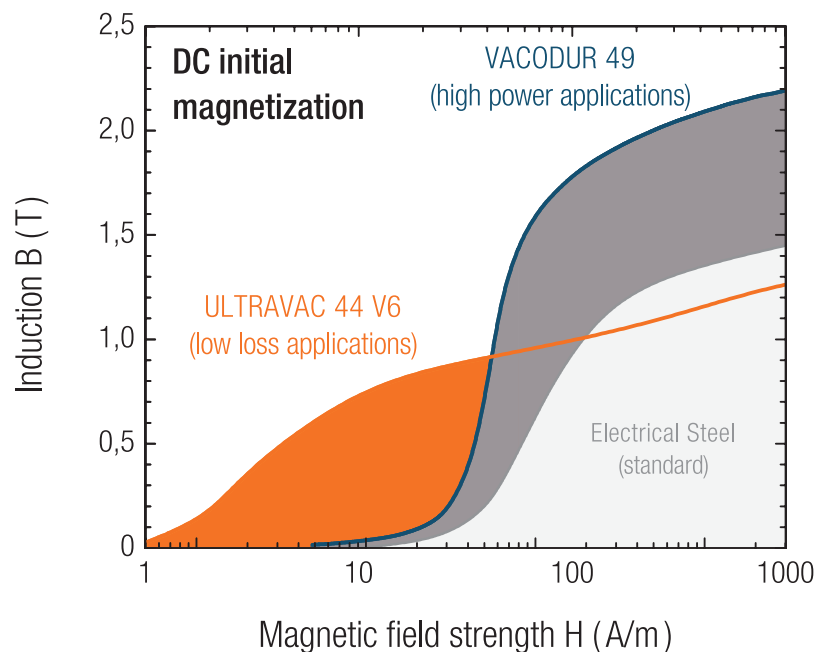


VACUUMSCHMELZE is one of the world leaders in the field of magnetic materials. The product range covers soft magnetic materials and products as well as permanent magnets and inductive components. Our strength is the development and production of innovative materials. VAC's product range of soft magnetic materials comprises Nickel-Iron (e.g. PERMENORM, MEGAPERM, ULTRAVAC) and Cobalt-Iron (VACOFLUX, VACODUR) alloys as well as amorphous and nanocrystalline alloys.

Our Cobalt-Iron alloys VACOFLUX 48 and VACOFLUX 50 have the highest saturation polarisation and surpass all known soft magnetic materials. A variety of properties may be obtained by using special compositions and selecting the optimum production procedures.

VACODUR 49 and VACODUR 50 are further developments of VACOFLUX 50 with respect to higher strength and ductility. Optimum mechanical performance for high-speed rotating motors and generators can be achieved with the newly developed VACODUR S Plus. This material shows extra high strength properties in combination with good magnetic performance.

A high induction B is the most important property to achieve a maximum magnetic force F. Due to the fact that the force in motors and actuators increases with square of the induction VACOFLUX and VACODUR open up new possibilities for high power density solutions.

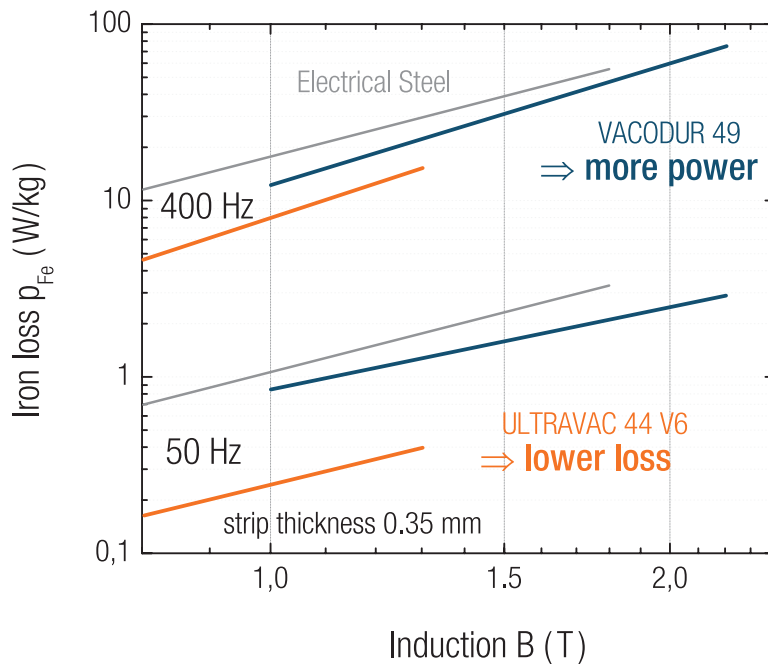

In comparison to Electrical Steel VAC alloys offer lower iron losses in all cases:

- Lower Hysteresis Losses because of lower Coercivity Forces:
Nickel-Iron Alloys: PERMENORM, MEGAPERM, ULTRAVAC
- Lower Eddy Current Losses because of higher electrical resistivity
Nickel-Iron Alloys: PERMENORM, MEGAPERM, ULTRAVAC
- Lower additional Loss effect
Cobalt-Iron Alloys: VACOFLUX, VACODUR

Beside the iron losses the easy magnetisation of the VAC alloys offers a reduction of the required current to achieve equivalent induction values. Therefore the copper losses are minimized, too.

ALLOY COMPARISON (typical properties for 0.35 strip material)

Property	Induction			Iron Loss			Yield Strength $R_{p0.2}$
	@800A/m B_{800}	@1T/50Hz $p_{Fe} 1/50$	@1T/400Hz $p_{Fe} 1/400$	@1.5T/50Hz $p_{Fe} 1.5/50$	@1.5T/400Hz $p_{Fe} 1.5/400$	@2T/50Hz $p_{Fe} 2/50$	
Unit	(T)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(MPa)
Electrical Steel (Standard)							
M270-35A	1.45	1.0	17	2.5	42	–	450
Cobalt-Iron Alloys (High Power & Strength)							
VACOFLUX 48	2.18			1.5	30	2.2	190
VACODUR 49 (mag. opt.)	2.10			1.6	31	2.5	210
VACODUR 49 (mag. opt.)	2.05			2.9	43	5.0	390
VACODUR S+ (mag. opt.)	1.20			17	154	32	800
Nickel-Iron Alloys (Low Loss)							
PERMENORM 5000 V5	1.45	0.25	9.1	0.59	26	–	< 300
MEGAPERM 40 L	1.45	0.28	8.6	–	–	–	< 300
ULTRAVAC 44 V6	1.25	0.25	8.1	–	–	–	< 300

FORMS OF SUPPLY AND DELIVERY STATES**Materials**

Cold rolled strips and sheets

- Thickness range 0,05 - 2 mm, customized production
- Customized width
- Optional with insulation coating

Hot rolled, forged or cold drawn rods

- Diameter range 4 - 100 mm, customized production
- Customized surface condition

In order to achieve optimum soft-magnetic properties the material has to get a final magnetic heat treatment. If this cannot be done by the customer, the heat treatment can be offered by VAC. Further information can be found in our brochure 'Soft Magnetic Materials and Semi-finished Products' (www.vacuumschmelze.com)

Parts

VAC is also producing parts, final annealed laminations and assemblies especially for motor and generator applications. Please see our separate leaflet.

VACUUMSCHMELZE GMBH & CO. KG

GRÜNER WEG 37 • D 63450 HANAU / GERMANY

PHONE +49 6181 380 • FAX +49 6181 382645

INFO@VACUUMSCHMELZE.COM • WWW.VACUUMSCHMELZE.COM

**ADVANCED MATERIALS – THE KEY TO PROGRESS**